



COUNTY OF SAN DIEGO • DEPARTMENT OF PLANNING AND LAND USE  
BUILDING DIVISION

## INSPECTION FORM: Series Rated Combination

This form is to be used on commercial projects when the designer of record (architect or electrical engineer) is proposing to install series rated equipment. It provides documentation to assure compliance with the following National Electrical Code sections on the use of Series Rated Combinations: 110.9, 110.22 & 240.86


PERMIT #: \_\_\_\_\_

NAME: \_\_\_\_\_

LOCATION: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

### ESSENTIAL INFORMATION:

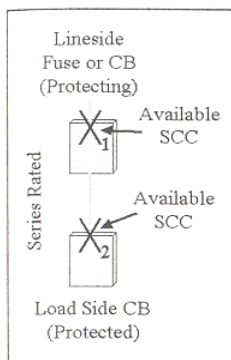

**Line Side Panel Designation (If Applicable)** \_\_\_\_\_

Line Side Overcurrent Protective Device Part Number \_\_\_\_\_

Line Side Overcurrent Protective Device Interrupting Rating \_\_\_\_\_

**X<sub>2</sub>** Available Short Circuit Current at Line side OCP Device \_\_\_\_\_

**Load Side Panel Designation** \_\_\_\_\_

Load Side Circuit Breaker Part Number \_\_\_\_\_

Load Side Circuit Breaker Individual Interrupting Rating \_\_\_\_\_

Series Combination Interrupting Rating \_\_\_\_\_

**X<sub>2</sub>** Available Short Circuit Current at Load side Circuit Breaker \_\_\_\_\_

### COMPLIANCE CHECKLIST

**1. Short-Circuit Currents**

Is the interrupting rating of the line side fuse or circuit breaker greater than the available short-circuit current (**X<sub>1</sub>**) at its lineside (110.9) ☐ YES ☐ NO

Is the series combination interrupting rating greater than the available short-circuit current (**X<sub>2</sub>**) at the load side circuit breaker (permitted per 240.86)? ☐ YES ☐ NO

**2. Manufacturer's Label**

Are both devices in use for the series rated combination marked on the end use equipment in which the load side circuit breaker is installed (or contained in a booklet affixed to the equipment) as required in 240.86(A)? ☐ YES ☐ NO

**3. Field Installed Label**

Are field labels, as required by 110.22, that indicate "CAUTION – Series Rated Combination", along with the required replacement parts, panel designations, and series combination interrupting rating, installed on all end use equipment that contain the series combination rating devices? ☐ YES ☐ NO

**4. Motor Contribution**

If motors are connected between the series rated devices, is the combined full load Current from these motors less than 1% of the downstream circuit breakers' interrupting Rating (individual or stand alone interrupting rating) per 240.86(B)? ☐ YES ☐ NO

**5. Selective Coordination**

Is this series rated combination being installed in something other than a health care facility (see NEC 517.17)? ☐ YES ☐ NO

Elevator circuits only: Is this series rated combination being installed on an elevator circuit with only one Elevator in the building (see NEC 620.62)?

**AN ANSWER OF "NO" TO ANY OF THESE QUESTIONS MAY INDICATE A LACK OF COMPLIANCE.  
LACK OF SUBMITTAL IS CONSIDERED AS EVIDENCE OF LACK OF COMPLIANCE.**

DPLU #132 (1/03)

5201 RUFFIN ROAD, SUITE B, SAN DIEGO, CA 92123-1666 • (858) 565-5920 • (888) 336-7553  
200 EAST MAIN ST.- SIXTH FLOOR, EL CAJON, CA 92020-3912 • (619) 441-4030  
338 VIA VERA CRUZ - SUITE 201, SAN MARCOS, CA 92069-2620 • (760) 471-0730